

R340X

DEFENCE SAFETY BOOT
CE EN 20345:2011 S1P SRA

R340X	UK	6	7	8	9	10	11	12	13
	EURO	40	41	42	43	44.5	46	47	48

CASE: 8
 Average weight per pair 1.7kg

R340X FABRIC

UPPER: Split Buffalo Leather & PU
 MIDSOLE: Steel
 SOLE: Dual Density Polyurethane
 TOE CAP: Steel

- Padded collar and tongue
- Energy absorption heel
- Dual density polyurethane sole
- Water resistant leather
- SRC slip resistance
- Sole resistance to oil
- Scuff cap
- Spare laces



Black



- Embout de protection en acier
- Semelle intermédiaire en acier pour protéger sous les pieds
- Collier et languette rembourrée
- Talons absorbeurs de chocs
- Semelle en polyuréthane double densité
- Cuir résistant à l'eau
- SRC Antidérapant
- Semelle résistante à l'huile
- Demi-Protection anti-éraflures
- Lacets de rechange.




- Stahlkappe
- Stahlzwischensohle
- Gepolsterter Kragen und Zunge
- Abfederung im Fersenbereich
- Polyurethansohle mit zweifach Verstärkung
- Wasserfestes Leder
- SRC rutschhemmend
- Ölbeständige Sohle
- 1/2 Kratzschutz
- Ersatzschürsenkel



WORK-GUARD

by **Result**[®]

R340X - DEFENCE SAFETY BOOTS INNER SOLE LENGTH/WIDTH

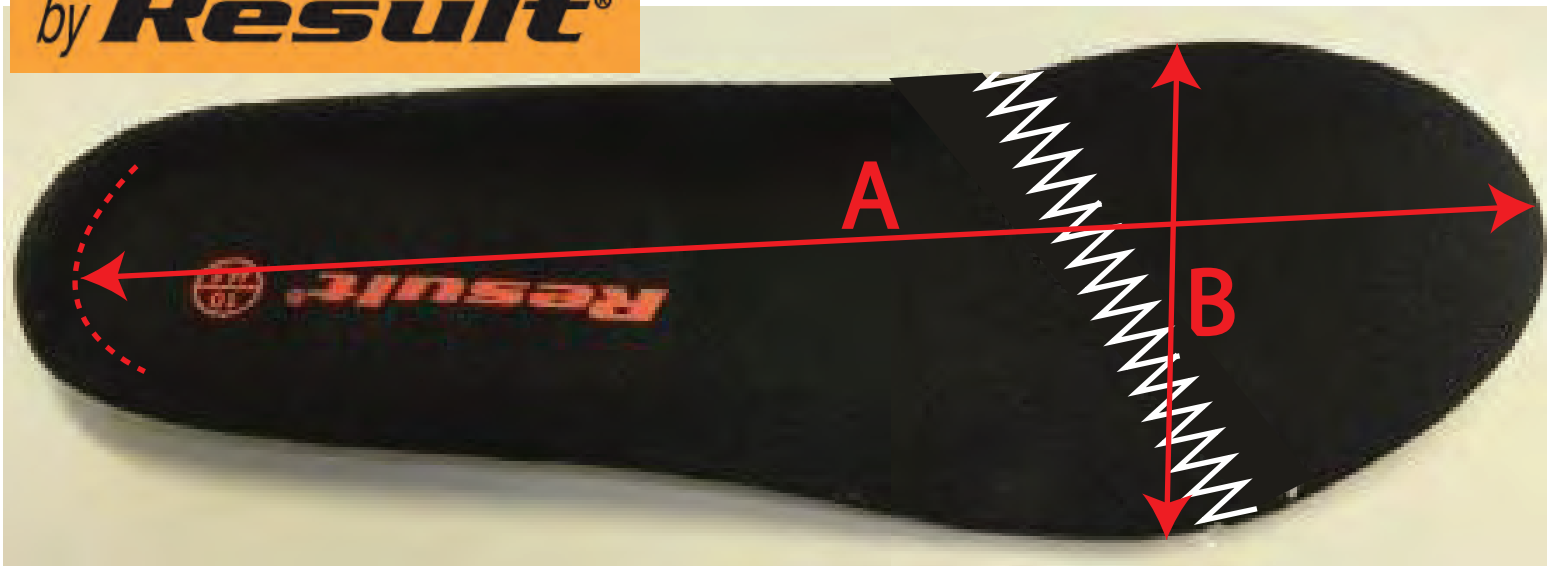

A = INSOLE LENGTH FROM INNER HEEL CURVE TO LONGEST POINT AT TOE

B = INSOLE WIDTH ACROSS WIDEST PART.


SIZE	UK	Euro	A	B
	6	40	26.0	9.0
	7	41	26.5	9.3
	8	42	27.2	9.5
	9	43	27.7	9.7
	10	44.5	28.5	9.7
	11	46	29.5	10.2
	12	47	30.5	10.3
	13	48	31.0	10.3

Measures given in Cms

WORK-GUARD

by **Result**[®]

R340X - DEFENCE SAFETY BOOTS INNER SOLE LENGTH/WIDTH

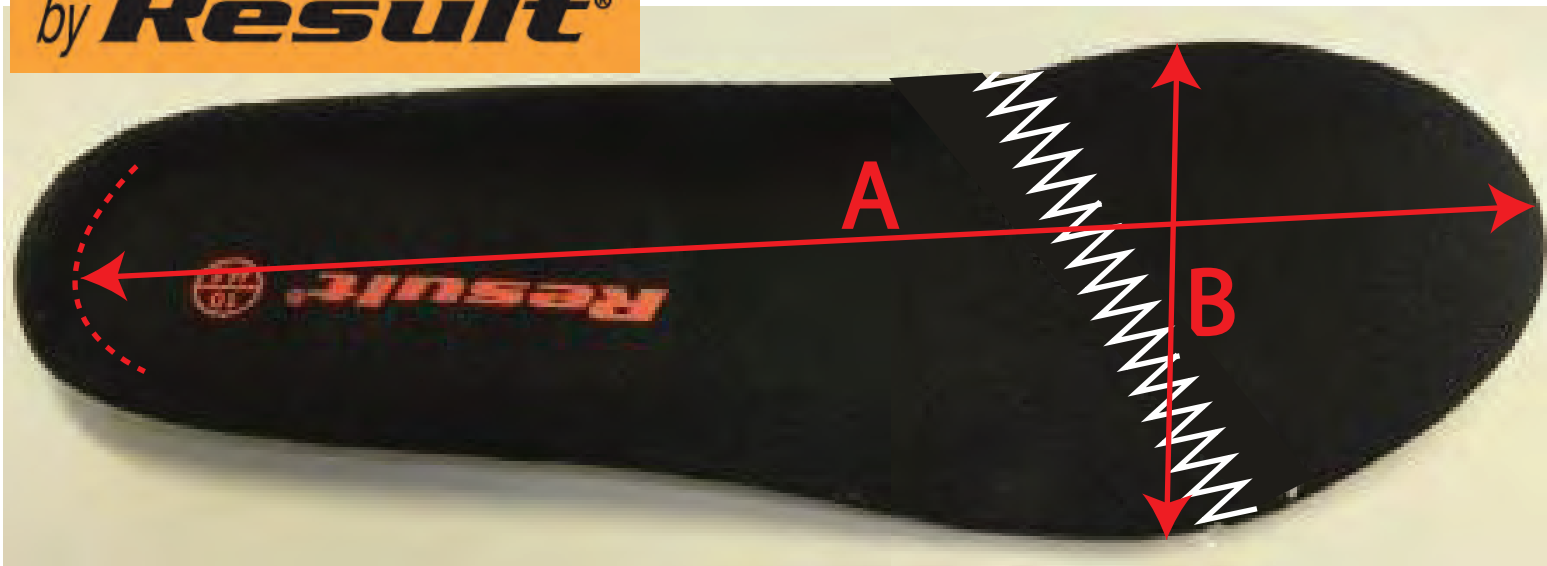

A = INSOLE LENGTH FROM INNER HEEL CURVE TO LONGEST POINT AT TOE

B = INSOLE WIDTH ACROSS WIDEST PART.

SIZE	UK	Euro	A	B
	6	40	26.0	9.0
	7	41	26.5	9.3
	8	42	27.2	9.5
	9	43	27.7	9.7
	10	44.5	28.5	9.7
	11	46	29.5	10.2
	12	47	30.5	10.3
	13	48	31.0	10.3

Measures given in Cms